




# 动臂式塔式起重机 设备配置与参数

CTL 230 (5522)

本数据仅供参考，如有更改，恕不另行通知


This data is for informational purposes only, and is subject to change  
without prior notice

外形尺寸 Outline Dimensions

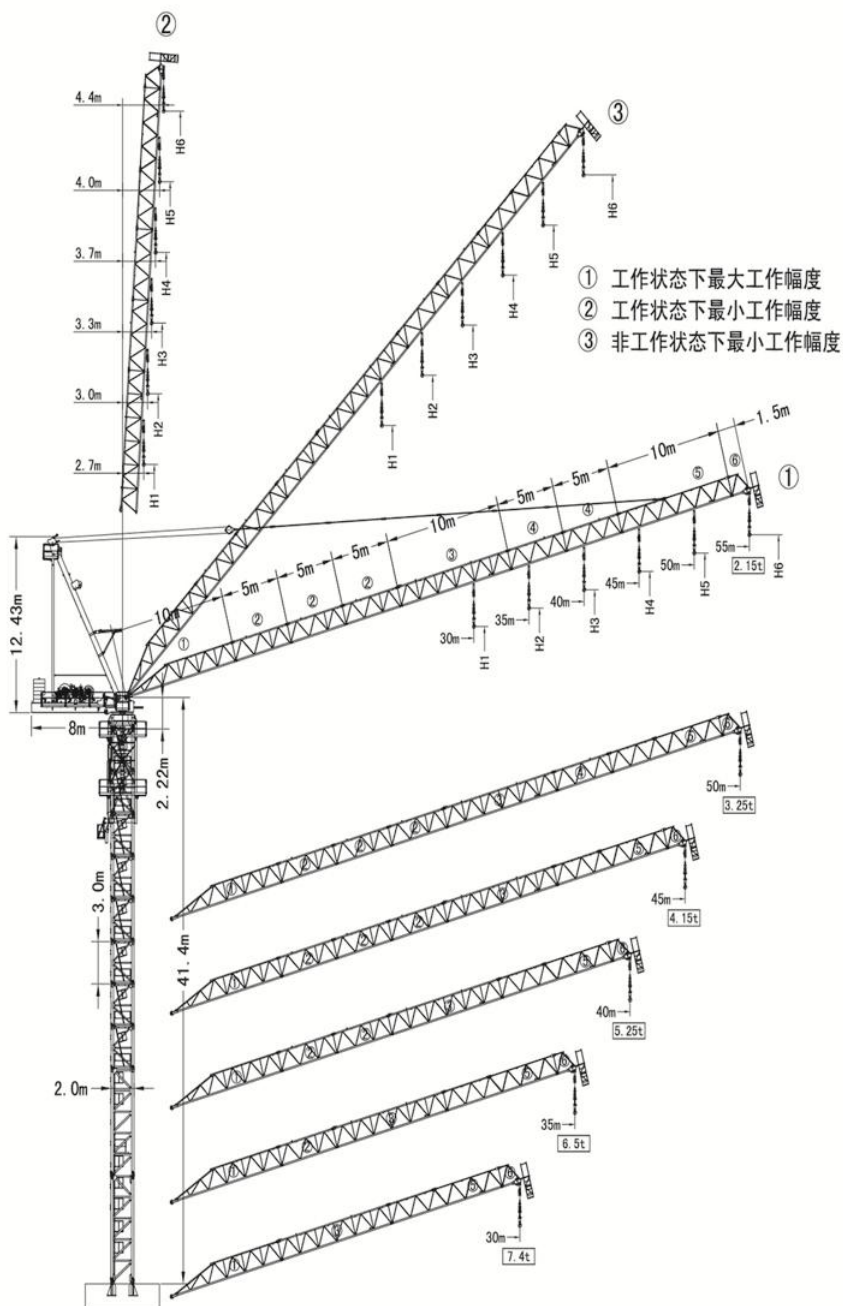


塔身截面 Masts


幅度 (m)		①	②	③	起重臂配置	平衡重量	PHZ4190
L1	30	H+5.0m	H+28.3m	H+20.3m	1+3+5+6	16760	4
L2	35	H+6.3m	H+33.3m	H+23.9m	1+2×1+3+5+6	16760	4
L3	40	H+7.6m	H+38.3m	H+27.5m	1+2×2+3+5+6	16760	4
L4	45	H+8.9m	H+43.3m	H+31.1m	1+2×3+3+5+6	16760	4
L5	50	H+10.2m	H+48.3m	H+34.7m	1+2×3+3+4×1+5+6	16760	4
L6	55	H+11.5m	H+53.3m	H+38.3m	1+2×3+3+4×2+5+6	16760	4

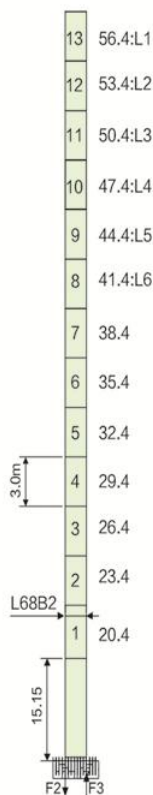

	●	■
F2	164t	229t
F3	124t	190t
⊕	61t	

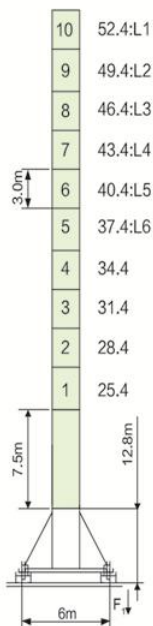

	●	■
F1	101t	120t
⊕	68t	

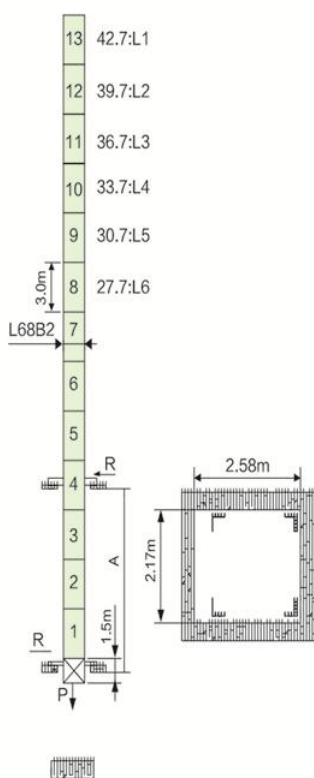












A	R	P
11-20m	27t	71.1t

● 工作状态支反力 Reactions in service

■ 非工作状态支反力 Reactions out of service

⊕ 不含平衡重及压重塔机重量 Total weight of free standing crane (exclude Counter weight & ballast)

### 载荷特性表 Load Diagrams 14t

R(m)	fall	R(C <sub>max</sub> (m))	C <sub>max</sub> (t)	86	70	64	61	58	56	52	45	42	37.5	28	24	15
				4.0	20	25	28	30	32	35	40	42	45	50	52	55
55		29.0	7.0	7.0	7.0	7.0	7.0	6.9	6.3	5.4	4.3	3.9	3.4	2.7	2.45	2.15
R(m)	fall	R(C <sub>max</sub> (m))	C <sub>max</sub> (t)	86	67	61	57	55	52	48	43	40	36	30	25	15
				3.8	20	25	28	30	32	35	38	40	42	45	47	50
50		23.7	10.0	10.0	10.0	9.3	7.9	7.0	6.3	5.4	5.0	4.7	4.3	3.7	3.4	3.0
		32.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	6.1	5.0	4.9	4.5	3.9	3.7	3.25
R(m)	fall	R(C <sub>max</sub> (m))	C <sub>max</sub> (t)	86	65	58	55	50	47	41	38	31	26	15		
				3.5	20	25	28	30	32	35	38	40	42	45		
45		18.7	14.0	14.0	12.8	9.4	8.4	7.4	6.9	6.0	5.5	4.8	4.4	3.9		
		32.5	7.0	7.0	7.0	7.0	7.0	7.0	7.0	6.3	5.8	5.1	4.7	4.15		
R(m)	fall	R(C <sub>max</sub> (m))	C <sub>max</sub> (t)	86	62	53	50	44	40	33	28	15				
				3.2	20	25	28	30	32	35	38	40				
40		18.8	14.0	14.0	13.0	9.6	8.6	7.4	7.1	6.2	5.7	5.0				
		33.1	7.0	7.0	7.0	7.0	7.0	7.0	6.5	6.0	5.25					
R(m)	fall	R(C <sub>max</sub> (m))	C <sub>max</sub> (t)	86	57	47	43	35	30	15						
				2.8	20	25	28	30	32	35						
35		18.8	14.0	14.0	13.0	9.6	8.6	7.4	7.1	6.2						
		33.4	7.0	7.0	7.0	7.0	7.0	7.0	6.5							
R(m)	fall	R(C <sub>max</sub> (m))	C <sub>max</sub> (t)	86	51	38	32	15								
				2.8	20	25	28	30								
30		18.8	14.0	14.0	13.0	9.6	8.6	7.4								
		30.0	7.0	7.0	7.0	7.0	7.0									

### 机构 Mechanisms 14t

名称	机构代号	工作速度 (m/min)		起重量(t)	容绳量(m)	电机功率
起升 Hoisting	55LVF35	双绳 2 fall	0~40	7.0	550 >550*	55
			0~80	3.5		
		四绳 4 fall	0~20	14.0		
			0~40	7.0		
变幅机构 Trolleying	55DFV40	3.0min			55	
回转机构 Slewing	2RVF7.5	0~0.6			7.5×2	
电源 Power	380V ( ±10% ) /50Hz*					



## **山东大汉建设机械股份有限公司**

地址：山东省济南市章丘区明水经济开发区赭山工业园

电话：+86 ( 531 ) 83260789

网址：www.dhtj.com

邮编：250200

## **Shandong Dahan Construction Machinery Co.,Ltd.**

Add : Zheshan Industrial Part,Mingshui Development  
Zone,Zhangqiu,Jinan City,Shandong Province,China

TEL : +86 ( 531 ) 83260789

Web : [http:// www.dhtj.com](http://www.dhtj.com)

ZIP CODE : 250200